



DD-SILVER ET2

TUMBLE

DRYERS

DD-11 / 14 / 16



### EASY TOUCH 2

7" touch screen user friendly and programmable ET2  
USB Connection. PC software free of charge for programming, traceability, data analysis...  
Videos on display (ads, instructions, etc.)  
37 languages



### OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



### EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter



### VERSATILITY

Make to order - customisation  
WET CLEANING  
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



### CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters  
Opening sense of door adjustable on site



### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



### OTHERS

Grey skinplate outer casing, stainless steel look  
Transmission by direct drive  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Electric, gas and steam heating  
CE approved



## OPTIONS

- CARE DRY - Intelligent humidity control with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- SPRINKLER - Integrated Fire Extinguishing System
- New perfumes dosing/vaporizing system
- Printer
- Danube Online IoT communication
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Fluff filter with grid 0,6 or 1,2 mm (standard is 0,3 mm)
- Rear panel with external air inlet + filter




Intertek



Intertek

| TECHNICAL DATA                         | UNIT.        | DD-11 SILVER ET2  | DD-14 SILVER ET2   | DD-16 SILVER ET2  |                    |                   |                    |
|--|--------------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| <b>CAPACITY</b>                        |              |                   |                    |                   |                    |                   |                    |
| Capacity 1/18                          | Kg           | 12                | 15                 | 18                |                    |                   |                    |
| Capacity 1/20                          | Kg           | 11                | 13,5               | 17                |                    |                   |                    |
| Hourly Output SILVER*                  | Kg/h         | 23-21             | 34-30              | 35-33             |                    |                   |                    |
| Evaporation capacity SILVER*           | l/h          | 14,5              | 15,40              | 16,3              |                    |                   |                    |
| <b>DRUM</b>                            |              |                   |                    |                   |                    |                   |                    |
| Ø Drum                                 | mm           | 750               | 750                | 750               |                    |                   |                    |
| Ø Door                                 | mm           | 574               | 574                | 574               |                    |                   |                    |
| Door center height                     | mm           | 976               | 976                | 976               |                    |                   |                    |
| Load hole bottom height                | mm           | 689               | 689                | 689               |                    |                   |                    |
| Drum length                            | mm           | 475               | 610                | 746               |                    |                   |                    |
| Drum volume                            | l            | 210               | 270                | 330               |                    |                   |                    |
| <b>POWER</b>                           |              |                   |                    |                   |                    |                   |                    |
| Drum motor power                       | Kw           | 0,37              | 0,37               | 0,37              |                    |                   |                    |
| Fan motor power SILVER                 | Kw           | 0,25              | 0,25               | 0,25              |                    |                   |                    |
| Electric heating power ALL RANGES      | Kw           | 12                | 18                 | 18                |                    |                   |                    |
| Total electric power (elec.model) SILV | Kw           | 12,67             | 18,67              | 18,67             |                    |                   |                    |
| Gas heating power ALL RANGES           | Kw           | 20,51             | 20,51              | 20,51             |                    |                   |                    |
| Total electric power (gas model) SILV  | Kw           | 0,67              | 0,67               | 0,67              |                    |                   |                    |
| Steam heating power ALL RANGES         | Kw           | 30                | 30                 | 30                |                    |                   |                    |
| Total electric power (steam mod.) SILV | Kw           | 0,67              | 0,67               | 0,67              |                    |                   |                    |
| <b>CONNECTIONS</b>                     |              | <b>ELECTRICAL</b> | <b>STEAM / GAS</b> | <b>ELECTRICAL</b> | <b>STEAM / GAS</b> | <b>ELECTRICAL</b> | <b>STEAM / GAS</b> |
| Tension 230V - I + N + T               | Nº x mm2 / A | 3 x 25 / 63A      | 3 x 1,5 / 20A      | -                 | 3 x 1,5 / 20A      | -                 | 3 x 1,5 / 20A      |
| Tension 230V - III + T                 | Nº x mm2 / A | 4 x 10 / 40A      | 3 x 1,5 / 20A      | 4 x 16 / 63A      | 3 x 1,5 / 20A      | 4 x 16 / 63A      | 3 x 1,5 / 20A      |
| Tension 400V - III + N + T             | Nº x mm2 / A | 5 x 4 / 25A       | 3 x 1,5 / 20A      | 5 x 10 / 32A      | 3 x 1,5 / 20A      | 5 x 10 / 32A      | 3 x 1,5 / 20A      |
| Ø Gas inlet                            | BSP          | 1/2"              |                    | 1/2"              |                    | 1/2"              |                    |
| Ø Steam inlet                          | BSP          | 3/4"              |                    | 3/4"              |                    | 3/4"              |                    |
| Ø Condensed (Steam models)             | BSP          | 3/4"              |                    | 3/4"              |                    | 3/4"              |                    |
| <b>DIMENSIONS / PACKING DIMENSIONS</b> |              |                   |                    |                   |                    |                   |                    |
| Net Width / Gross Width                | mm           | 785 / 865         |                    | 785 / 865         |                    | 785 / 865         |                    |
| Net Depth / Gross Depth                | mm           | 855 / 940         |                    | 989 / 1.074       |                    | 1.125 / 1.210     |                    |
| Net Height / Gross Height              | mm           | 1.694 / 1.840     |                    | 1.694 / 1.840     |                    | 1.694 / 1.840     |                    |
| Height without heating battery         | mm           | -                 |                    | -                 |                    | -                 |                    |
| Net weight / Gross weight              | Kg           | 172 / 180         |                    | 180 / 190         |                    | 187 / 200         |                    |
| <b>OTHERS</b>                          |              |                   |                    |                   |                    |                   |                    |
| Max airflow SILVER                     | m3/h         | 850               |                    | 850               |                    | 850               |                    |
| Ø Fume exhaust                         | mm           | 200               |                    | 200               |                    | 200               |                    |
| Sound level SILVER                     | dB           | 64                |                    | 64                |                    | 64                |                    |

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

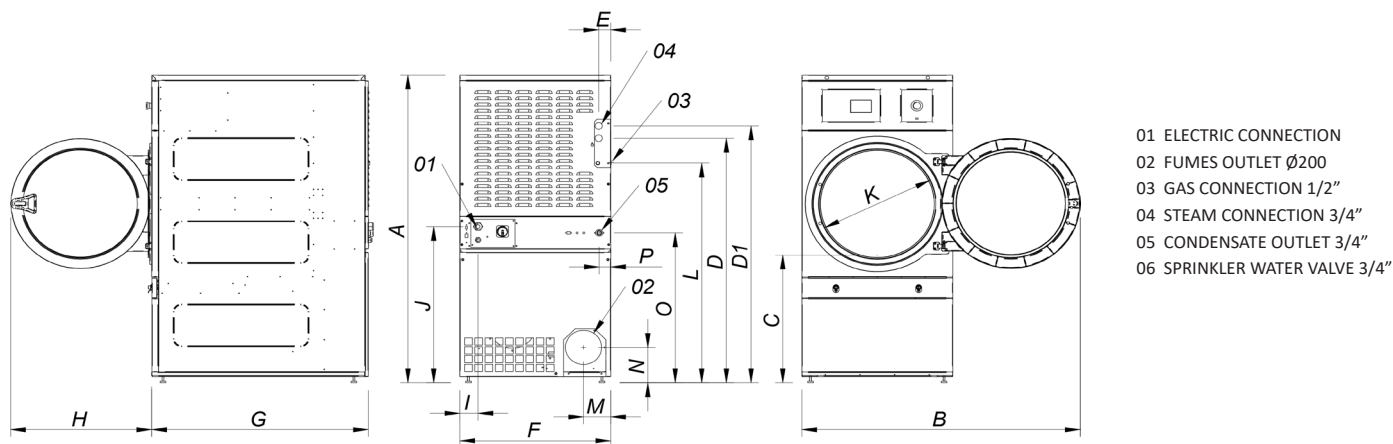

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 GAS CONNECTION 1/2"
- 04 STEAM CONNECTION 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER WATER VALVE 3/4"

|       | A    | B    | C   | D    | D1   | E  | F   | G    | H   | I  | J   | K   | L    | M   | N   | O   | P  |
|-------|------|------|-----|------|------|----|-----|------|-----|----|-----|-----|------|-----|-----|-----|----|
| DD-11 | 1694 | 1447 | 689 | 1354 | 1422 | 68 | 785 | 855  | 735 | 95 | 870 | 575 | 1226 | 133 | 180 | 830 | 65 |
| DD-14 | 1694 | 1447 | 689 | 1354 | 1422 | 68 | 785 | 989  | 735 | 95 | 870 | 575 | 1226 | 133 | 180 | 830 | 65 |
| DD-16 | 1694 | 1447 | 689 | 1354 | 1422 | 68 | 785 | 1125 | 735 | 95 | 870 | 575 | 1226 | 133 | 180 | 830 | 65 |