



DD-HP GOLD ET2 TUMBLE DRYERS

DD-HP 11 / 16 / 23

EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. PC software free of charge for programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter
Double door glass
CARE DRY - Intelligent humidity control



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
No need of exhaust to the exterior
Low energy consumption
Water to refrigerate, which may be reused to wash
CE approved



OPTIONS

- Reverse door opening
- Tropicalized model
- Danube Online IoT communication
- Stainless steel outer casing
- Stainless steel front panel
- Rear panel with external air inlet + filter
- Reverse door opening
- New perfumes dosing/vaporizing system



Intertek




Intertek

TECHNICAL DATA	UNIT.	DD-11 HP GOLD	DD-16 HP GOLD	DD-23 HP GOLD
CAPACITY				
Capacity 1/20	Kg	12	18	26
Capacity 1/30	Kg	11	17	23
Hourly Output*	Kg/h	15	18,9	22,9
Evaporation capacity*	l/h	7,5	9,5	11,5
DRUM				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
POWER				
Drum motor power	kW	0,37	0,37	0,37
Fan motor power	kW	0,55	0,55	0,55
Electric heating power ALL RANGES	kW	3,8 + 4,0 ***	3,8 + 4,0 ***	3,8 + 4,0 ***
Total electric power HP GOLD	kW	8,77	8,77	8,77
Energetic consumption	** kWh/ l	1,28	1,17	1,05
Nominal airflow	m3/h	1.200	1.200	1.200
CONNECTIONS		ELECTRICAL		ELECTRICAL
Tension 400V - III + N + T (50 Hz)	N° x mm2 / A	5 x 4 / 20A	5 x 4 / 20A	5 x 4 / 20A
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
DIMENSIONS / PACKING DIMENSIONS				
Net width / Gross width	mm	785 / 865	785 / 865	890 / 970
Net Depth / Gross Depth	mm	1.255/ 1.380	1.525 / 1.650	1.595 / 1.720
Net Height / Gross Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	Kg	342 / 356	357 / 372	380 / 395
OTHERS				
Sound level	dB	64	64	64

* it may vary depending on the type of heating, filter cleanliness or extraction type

** kWh per litre of evaporated water

*** Compressor + resistances

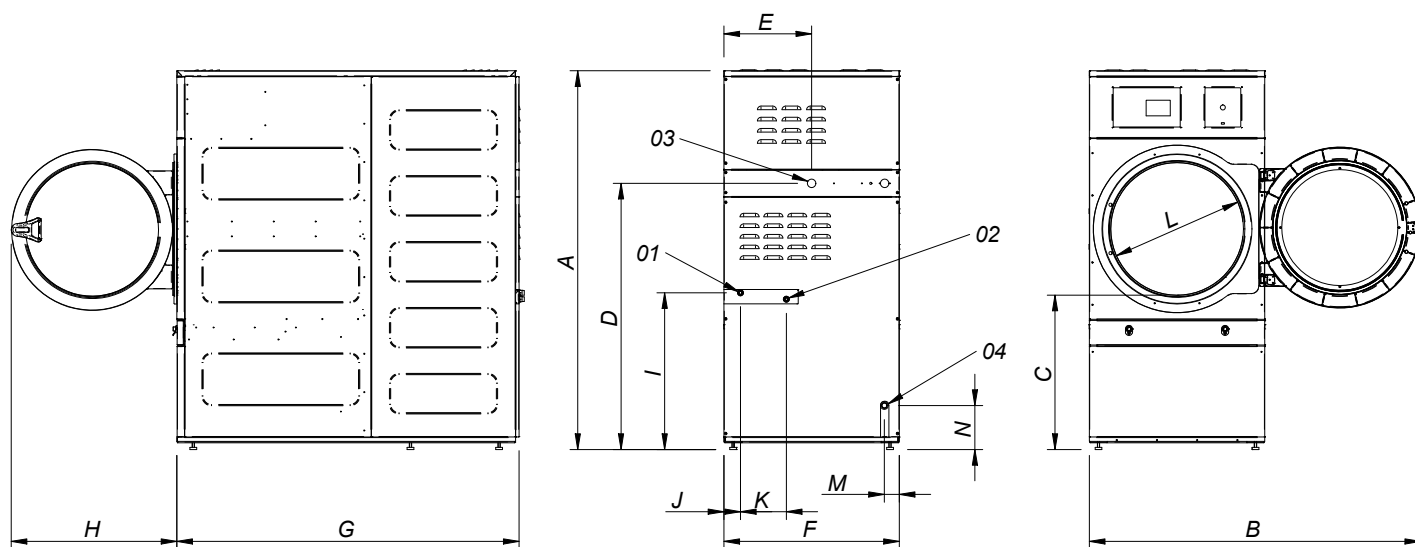

01 REFRIGERATION WATER INLET 1/2"

02 REFRIGERATION WATER OUTLET (HOT) 1/2"

03 ELECTRIC CONNECTION

04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DD-11 HP	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
DD-16 HP	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
DD-23 HP	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250