



DD-GOLD ET2 TUMBLE DRYERS

DD-23 / 28 / 35



EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. PC software free of charge for programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

CARE DRY - Intelligent humidity control. With new drum inlet temperature control
AIR RE-CYCLE - Efficient air recirculation system
INSULATED PANELS - Complete air-flow circuit
Double door glass
OPTIMAL FLOW - New 'optimized' system of mixed airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING



CONNECTIVITY

Remote technical service
Management of laundries



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
SPRINKLER - Integrated Fire Extinguishing System
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric, gas and steam heating
CE approved



OPTIONS

- New perfumes dosing/vaporizing system
- Printer
- Danube Online communication kit
- Tropicalized model
- Rear panel with external air inlet + filter
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel battery
- Low pressure steam battery
- Reverse door opening
- Fluff filter with grid 0,6 or 1,2 mm (standard is 0,3 mm)




Intertek



Intertek

| TECHNICAL DATA | UNIT. | DD-23 GOLD ET2 | DD-28 GOLD ET2 | DD-35 GOLD ET2 | | | |
|---|--------------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
| CAPACITY | | | | | | | |
| Capacity 1/18 | Kg | 26 | 31 | 37 | | | |
| Capacity 1/20 | Kg | 23 | 28 | 33 | | | |
| Hourly Output GOLD* | Kg/h | 44-41 | 64-56 | 80-70 | | | |
| Evaporation capacity GOLD* | l/h | 23 | 31,80 | 34,70 | | | |
| DRUM | | | | | | | |
| Ø Drum | mm | 855 | 947 | 947 | | | |
| Ø Door (load hole) | mm | 574 | 802 | 802 | | | |
| Door center height | mm | 1.030 | 1.040 | 1.040 | | | |
| Load hole bottom height | mm | 743 | 640 | 640 | | | |
| Drum length | mm | 800 | 780 | 936 | | | |
| Drum volume | l | 460 | 550 | 660 | | | |
| POWER | | | | | | | |
| Drum motor power | Kw | 0,37 | 0,55 | 0,55 | | | |
| Fan motor power GOLD | Kw | 0,75 | 0,75 | 0,75 | | | |
| Electric heating power ALL RANGES | Kw | 24 | 30 | 36 | | | |
| Total electric power (elec.model) GOLD | Kw | 25,17 | 31,35 | 37,35 | | | |
| Gas heating power ALL RANGES | Kw | 31 | 41 | 41 | | | |
| Total electric power (gas model) GOLD | Kw | 1,17 | 1,35 | 1,35 | | | |
| Steam heating power ALL RANGES | Kw | 49,20 | 50,10 | 50,10 | | | |
| Total electric power (steam model) GOLD | Kw | 1,17 | 1,35 | 1,35 | | | |
| CONNECTIONS | | | | | | | |
| | | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS | ELECTRICAL | STEAM / GAS |
| Tension 230V - I + N + T | Nº x mm2 / A | - | 3 x 1,5 / 20A | - | 3 x 1,5 / 20A | - | 3 x 1,5 / 20A |
| Tension 230V - III + T | Nº x mm2 / A | 4 x 25 / 80A | 3 x 1,5 / 20A | 4 x 35 / 100A | 3 x 1,5 / 20A | 4 x 50 / 125A | 3 x 1,5 / 20A |
| Tension 400V - III + N + T | Nº x mm2 / A | 5 x 10 / 40A | 3 x 1,5 / 20A | 5 x 16 / 63A | 3 x 1,5 / 20A | 5 x 16 / 63A | 3 x 1,5 / 20A |
| Ø Gas inlet | BSP | | 1/2" | | 1/2" | | 1/2" |
| Ø Steam inlet | BSP | | 1" | | 1" | | 1" |
| Ø Condensed (Steam models) | BSP | | 1" | | 1" | | 1" |
| DIMENSIONS / PACKING DIMENSIONS | | | | | | | |
| Net Width / Gross Width | mm | 890 / 970 | 985 / 1.065 | 985 / 1.065 | | | |
| Net Depth / Gross Depth | mm | 1.255 / 1.345 | 1.054 / 1.154 | 1.210 / 1.310 | | | |
| Net Height / Gross Height | mm | 1.812 / 1.940 | 1.946 / 2.080 | 1.946 / 2.080 | | | |
| Height without heating battery | mm | - | - | - | | | |
| Net weight / Gross weight | Kg | 210 / 230 | 230 / 260 | 260 / 285 | | | |
| OTHERS | | | | | | | |
| Max airflow GOLD | m3/h | 1.500 | 1.500 | 1.500 | | | |
| Ø Fume exhaust | mm | 200 | 200 | 200 | | | |
| Sound level GOLD | dB | 65 | 65 | 65 | | | |

* It may vary depending on the type of heating, filter cleanliness or extraction type.

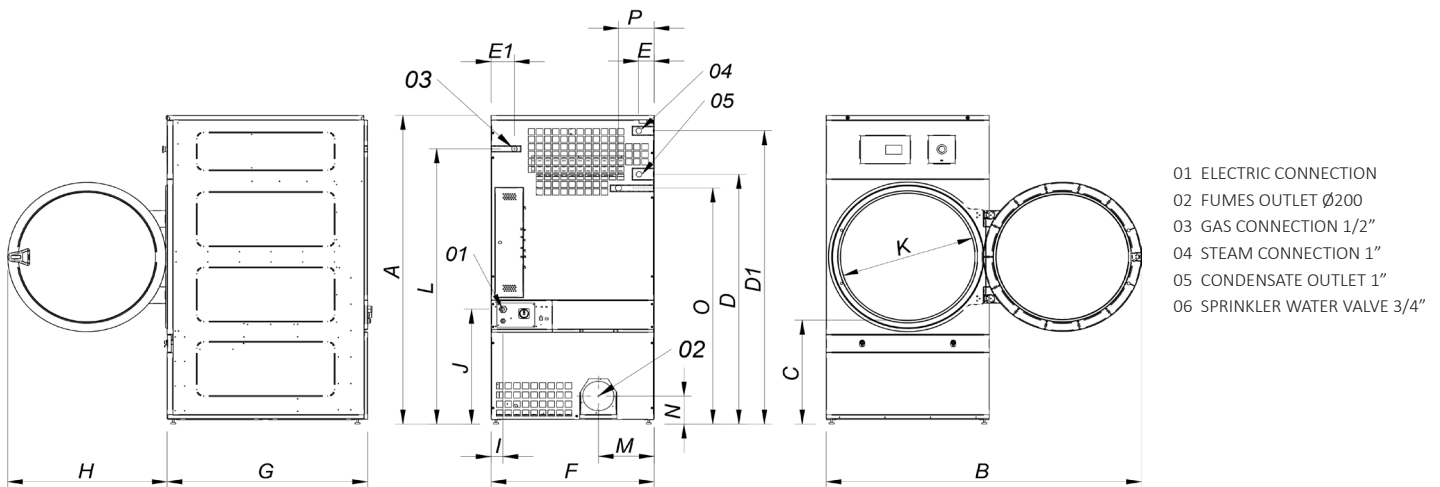

| | A | B | C | D | D1 | E | E1 | F | G | H | I | J | K | L | M | N | O | P |
|-------|------|------|-----|------|------|-----|-----|-----|------|-----|----|-----|-----|------|-----|-----|------|-----|
| DD-23 | 1812 | 1552 | 743 | 1430 | 1532 | 112 | 55 | 890 | 1255 | 735 | 95 | 920 | 575 | 1344 | 238 | 180 | 885 | 65 |
| DD-28 | 1946 | 1910 | 660 | 1590 | 1875 | 102 | 130 | 985 | 1054 | 970 | 70 | 730 | 802 | 1760 | 337 | 178 | 1510 | 215 |
| DD-35 | 1946 | 1910 | 660 | 1590 | 1875 | 102 | 130 | 985 | 1210 | 970 | 70 | 730 | 802 | 1760 | 337 | 178 | 1510 | 215 |