



PROFESSIONAL DRYERS

DPR-8 / DPR-10 EM



VERSATILITY

OPL <> SELF
SINGLE <> STACKED

Can be stacked with a WPR washer or another DPR dryer. Reversible control panel (except Basic model)
Suitable for many sectors: restaurants, hotels, gyms, campings, laundromats, nurseries, facility services (mops)...



FEATURES

EM PROGRAMMER: selection of time and temperature, simple and versatile (standard or self-service version)

Reduced drying time (less than 45 minutes)

Heating: 6,75 kw, option 4,5 kw (except Basic model: power 4,5 kw only)



EFFICIENCY

Improved airflow system

Big fluff filter as drawer

Stacked machines: control panel can be inverted to the bottom for better ergonomics (except Basic)



ROBUSTNESS

Outer casing in grey skinplate (white lacquered panels on Basic model)

Sturdy door made in aluminium

Drawer as fluff filter: not in the door

Industrial fan and powerful airflow

Sturdy construction of the structure and panels



OTHERS

Transmission by pulley and belt

Galvanized drum

Axial airflow

Big door diameter: 588 mm

Integrated COOL DOWN: anti-wrinkle at the end of drying cycle

Basic model available in two versions: three-phase model or single-phase model (not convertible)

Electric heating

CE approved



DPR-8/10 EM



WPR+DPR



DPR-10 BASIC EM

OPTIONS

- Programming console for EM control
- Reversible door opening
- AISI 304 stainless steel outer casing (except Basic)
- AISI 304 stainless steel drum (except Basic)
- Control panel in the bottom (stacked dryer)
- Ergonomic plinth (except Basic)
- Coiner kits: coins/tokens + box, central pay




Intertek



Intertek

TECHNICAL DATA	UNIT.	DPR-8 EM	DPR-10 EM / DPR-10 BASIC EM
DRUM			
Capacity 1:20	Kg	8	10
Volume	l	160	200
Drum diameter	mm	590	590
Drum depth	mm	585	690
GENERAL DATA			
EM control	-	Electronic	Electronic
USB connection	-	NO	NO
Construction	-	Skinplate	Skinplate / White lacqued panels
Plinth	-	Opt	Opt / Not available
Sound level	dB	62	62
Self service version	-	YES	YES / YES
DOOR			
Height door center	mm	554	554
Height door base	mm	320	320
Door diameter	mm	480	480
POWER			
Motor	kW	0,37	0,37
Electric heating	kW	4,5 / 6,75	4,5 / 6,75 (Basic : 4,5 only)
Gas heating	kW	7	7
LPG gas consumption	Kg/h	0,45	0,45
Natural gas consumption	m3/h	0,46	0,46
CONNECTIONS		ELECTRIC	ELECTRIC
Tension 230V I+N+T 50/60Hz	N° x mm2 / A	3 x 10 / 40A	3 x 10 / 40A
Tension 230V III +T 50/60Hz		4 x 4 / 25A	4 x 4 / 25A
Tension 400V III +N+T 50/60Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 440V III +T 60Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 480 V III + T 60Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Fume exhaust diameter	mm	100	100
Airflow	m3/h	300	300
DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	680 / 710	680 / 710
Net / gross depth	mm	722 / 832	775 / 832
Net / gross height	mm	1.056 / 1.141	1.056 / 1.141
Net / gross weight	kg	89 / 101	93 / 104
Volume	m3	0,67	0,67

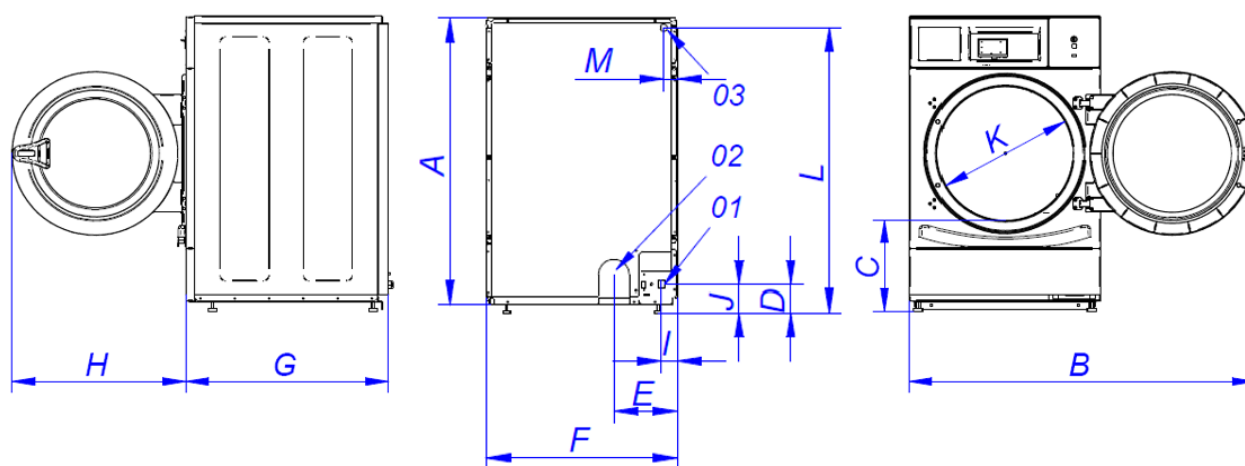

- 01 ELECTRICAL CONNECTION
- 02 EXHAUST Ø 100
- 03 GAS INLET 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DPR-8	1.056	1.227	320	140	226	680	722	615	57	91	480	1.015	50
DPR-10	1.056	1.227	320	140	226	680	775	615	57	91	480	1.015	50