



PROFESSIONAL DRYERS

DPR-8 / DPR-10 ET2



VERSATILITY

OPL <> SELF
SINGLE <> STACKED

Can be stacked with a WPR washer or another DPR dryer

Reversible control panel

Suitable for many sectors: restaurants, hotels, gyms, campings, laundromats, nurseries, facility services (mops)...



FEATURES

EASY TOUCH 2: user friendly and fully programmable microprocessor with a 4,3" touch screen

USB connection

Remote WiFi connection

Reduced drying time (less than 45 minutes)

Heating: 6,75 kw, option 4,5 kw



EFFICIENCY

Improved airflow system

Big fluff filter as drawer

Stacked machines: control panel can be inverted to the bottom for better ergonomics



ROBUSTNESS

Outer casing in grey skinplate

Sturdy door made in aluminium

Drawer as fluff filter: not in the door

Industrial fan and powerful airflow

Sturdy construction of the structure and panels



OTHERS

Transmission by pulley and belt

Galvanized drum

Axial airflow

Big door diameter: 588 mm

Integrated COOL DOWN: anti-wrinkle at the end of drying cycle

Electric heating

CE approved



WPR+DPR

OPTIONS

- CARE DRY : humidity control
- Reversible door opening
- AISI 304 stainless steel outer casing
- AISI 304 stainless steel drum
- Control panel in the bottom (stacked dryer)
- Danube Online communication
- Tropicalized model: protected board
- Ergonomic plinth (improved loading height)
- Coiner kits: coins/tokens + box, central pay




Intertek



Intertek

TECHNICAL DATA	UNIT.	DPR-8 ET2	DPR-10 ET2
DRUM			
Capacity 1:20	Kg	8	10
Volume	l	160	200
Drum diameter	mm	590	590
Drum depth	mm	585	690
GENERAL DATA			
ET2 control	-	4,3" touch screen	4,3" touch screen
USB connection	-	YES	YES
Construction	-	Skinplate	Skinplate
Plinth	-	Opt	Opt
Sound level	dB	62	62
Self service version	-	YES	YES
DOOR			
Height door center	mm	554	554
Height door base	mm	320	320
Door diameter	mm	480	480
POWER			
Motor	kW	0,37	0,37
Electric heating	kW	4,5 / 6,75	4,5 / 6,75
Gas heating	kW	7	7
LPG gas consumption	Kg/h	0,45	0,45
Natural gas consumption	m3/h	0,46	0,46
CONNECTIONS		ELECTRIC	ELECTRIC
Tension 230V I+N+T 50/60Hz	N° x mm2 / A	3 x 10 / 40A	3 x 10 / 40A
Tension 230V III +T 50/60Hz		4 x 4 / 25A	4 x 4 / 25A
Tension 400V III +N+T 50/60Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 440V III +T 60Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Tension 480 V III + T 60Hz		5 x 2,5 / 16A	5 x 2,5 / 16A
Fume exhaust diameter	mm	100	100
Airflow	m3/h	300	300
DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	680 / 710	680 / 710
Net / gross depth	mm	722 / 832	775 / 832
Net / gross height	mm	1.056 / 1.141	1.056 / 1.141
Net / gross weight	kg	89 / 101	93 / 104
Volume	m3	0,67	0,67

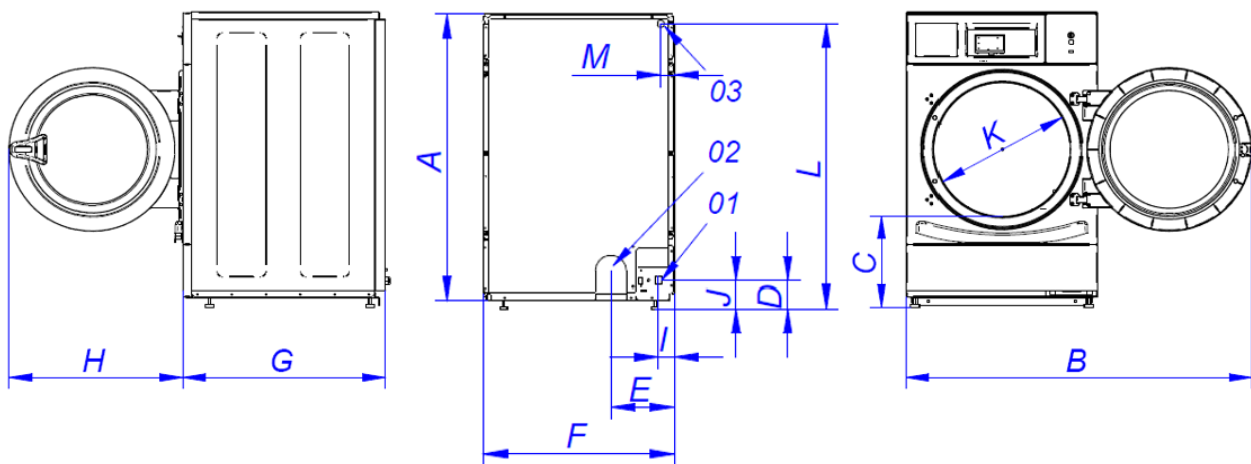

- 01 ELECTRICAL CONNECTION
- 02 EXHAUST Ø 100
- 03 GAS INLET 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DPR-8	1.056	1.227	320	140	226	680	722	615	57	91	480	1.015	50
DPR-10	1.056	1.227	320	140	226	680	775	615	57	91	480	1.015	50