



COMPACT IRONERS

Ø 1000 MM

S1000-2600 / S1000-3300



S models are ironers that dry and irons only, without any folding devices

- Roll dimensions: working width 2m60 and 3m30, diameter 1000 mm.
 - Frequency inverter.
 - Feeding and ironing by Nomex quality belts.
 - Panels in white painted steel.
 - Polished steel roll with fingers guard.
 - Touch screen control: programs can be created with speed control between 4 and 18 m/min and temperature.
 - Big output capacity: depending on the residual moisture of the linen, up to 290 kg/h straight from a high spin washer extractor.
 - Electric, gas or steam heating
 - Two versions for gas heated models:
 - gas with atmospheric burners,
 - gas with radiant burners
- 25 % gas consumption savings and 25 % more production**
- Powerful exhaust system
 - Compressed air connexion required: pressure 6,5 bar



OPTIONS

- 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass
- Motorized rear exit, height 850 mm
- Small pieces 2 lanes back collector + by-pass
- Small pieces 4 lanes back collector + by-pass
- Special tension




Intertek



Intertek

TECHNICAL DATA	UNIT.	S1000-2600	S1000-3300
GENERAL DATA			
Theoretical production (45 % humidity)	Kg/h	190 - 230	250 - 290
Ø roll	mm	1000	1000
Working width	mm	2.600	3.300
Height of feeding	mm	1.050	1.050
Ironing speed	m/min	4 - 18	4 - 18
Control type	-	Digital	Digital
No of programs	N°	20	20
FOLDING			
1 lane - lengthfold	N°	-	-
1 lane - crossfold	N°	-	-
2 lanes - lengthfold	N°	-	-
2 lanes - crossfold	N°	-	-
POWER			
Electric heating	kW	90	90
Max. electric power electric heating	kW	92,6	92,6
Gas heating (natural / LPG)	kW	120,90 / 121,30	155,70 / 159,10
Max. electric power gas heating	kW	2,6	2,6
Steam heating	kW	120	150
Max. electric power steam heating	kW	2,6	2,6
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1-1/4"	1-1/4"
Ø Condensed (steam models)	BSP	1"	1"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKING DIMENSIONS			
Net width / gross width	mm	3.790 / 3.900	4.490 / 4.570
Net depth / gross depth	mm	2.090 / 2.280	2.090 / 2.280
Net height / gross height	mm	2.430 / 2.400	2.430 / 2.400
Net weight / gross weight	kg	3.100 / 3.550	3.700 / 4.250
Volume	m3	19,25 / 21,89	22,80 / 25,01
OTHERS			
No fume outlet	No	2	2
Ø fume outlet	mm	160	160
Extraction rate	m3/h	2 x 1000	2 x 1000
Compressed air consumption (6,5 bar)	NI/h	5.000	5.000
Sound level	dB	70	70

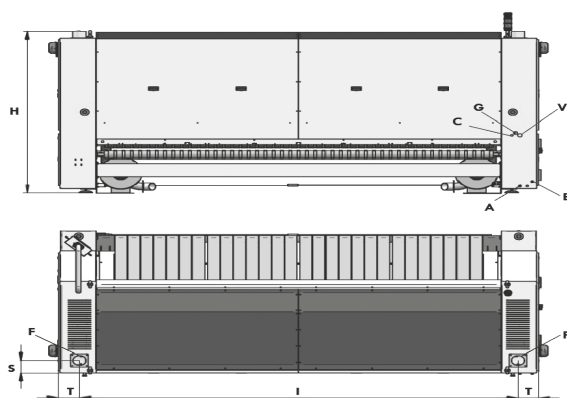

- A. Compressed air inlet
- C. Condensed discharge (steam models)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
S1000-2600	2.166	3.242	186	152	Ø 12	1"	5 x 2,5	Ø 120	1"	1-1/4"
S1000-3300	2.166	3.942	186	152	Ø 12	1"	5 x 2,5	Ø 120	1"	1-1/4"