



# COMPACT IRONERS

Ø 600 MM

S600-2600 / S600-3300



S models are ironers that dry and irons only, without any folding devices

- Roll dimensions: working width 2m60 and 3m30, diameter 600 mm.
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in white painted steel.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with speed control between 3 and 10 m/min and temperature.
- Big output capacity: depending on the residual moisture of the linen, up to 140 kg/h straight from a high spin washer extractor.
- Electric, gas or steam heating
- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar



## OPTIONS

- 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass
- Motorized rear exit, height 850 mm
- Small pieces 2 lanes back collector + by-pass
- Small pieces 4 lanes back collector + by-pass
- Special tension




Intertek



Intertek

| TECHNICAL DATA                         | UNIT. | S600-2600     | S600-3300     |
|----------------------------------------|-------|---------------|---------------|
| <b>GENERAL DATA</b>                    |       |               |               |
| Theoretical production (45 % humidity) | Kg/h  | 75 - 105      | 110 - 140     |
| Ø roll                                 | mm    | 600           | 600           |
| Working width                          | mm    | 2.600         | 3.300         |
| Height of feeding                      | mm    | 1.050         | 1.050         |
| Ironing speed                          | m/min | 3 - 10        | 3 - 10        |
| Control type                           | -     | Touch         | Touch         |
| No of programs                         | N°    | 20            | 20            |
| <b>FOLDING</b>                         |       |               |               |
| 1 lane - lengthfold                    | N°    | -             | -             |
| 1 lane - crossfold                     | N°    | -             | -             |
| 2 lanes - lengthfold                   | N°    | -             | -             |
| 2 lanes - crossfold                    | N°    | -             | -             |
| <b>POWER</b>                           |       |               |               |
| Electric heating                       | kW    | 54            | 54            |
| Max. electric power electric heating   | kW    | 55,9          | 55,9          |
| Gas heating (natural / LPG)            | kW    | 63,30 / 67,40 | 80,30 / 86.30 |
| Max. electric power gas heating        | kW    | 1,9           | 1,9           |
| Steam heating                          | kW    | 55            | 75            |
| Max. electric power steam heating      | kW    | 1,9           | 1,9           |
| <b>CONNECTIONS</b>                     |       |               |               |
| Ø Gas inlet                            | BSP   | 1"            | 1"            |
| Ø Steam inlet                          | BSP   | 1"            | 1"            |
| Ø Condensed (steam models)             | BSP   | 1/2"          | 1/2"          |
| Ø Air inlet                            | mm    | 12            | 12            |
| <b>DIMENSIONS / PACKING DIMENSIONS</b> |       |               |               |
| Net width / gross width                | mm    | 3.670 / 3.830 | 4.370 / 4.530 |
| Net depth / gross depth                | mm    | 1.440 / 1.620 | 1.440 / 1.620 |
| Net height / gross height              | mm    | 2.030 / 1.960 | 2.030 / 1.960 |
| Net weight / gross weight              | kg    | 1.800 / 2.050 | 2.050 / 2.350 |
| Volume                                 | m3    | 10,73 / 12,16 | 12,77 / 14,38 |
| <b>OTHERS</b>                          |       |               |               |
| No fume outlet                         | No    | 2             | 2             |
| Ø fume outlet                          | mm    | 120           | 120           |
| Extraction rate                        | m3/h  | 2 x 1000      | 2 x 1000      |
| Compressed air consumption (6,5 bar)   | NI/h  | 5.000         | 5.000         |
| Sound level                            | dB    | 70            | 70            |

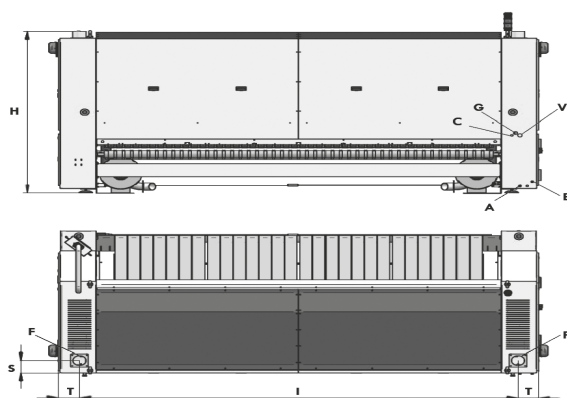

- A. Compressed air inlet
- C. Condensed discharge (steam models)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

|           | H     | I     | T   | S   | A    | C    | E       | F     | G  | V  |
|-----------|-------|-------|-----|-----|------|------|---------|-------|----|----|
| S600-2600 | 1.800 | 3.242 | 186 | 152 | Ø 12 | 1/2" | 5 x 2,5 | Ø 120 | 1" | 1" |
| S600-3300 | 1.800 | 3.942 | 186 | 152 | Ø 12 | 1/2" | 5 x 2,5 | Ø 120 | 1" | 1" |