



COMPACT IRONERS

Ø 1000 MM

SP1000-2600 / SP1000-3300



SP models are ironers that dries, irons and folds with a lengthwise folder making up to two length folds.

- Roll dimensions: working width 2m60 and 3m30, diameter 1000 mm.
- 1 or 2 length folds with 2 independent lanes
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in white painted steel.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with speed control between 4 and 18 m/min and temperature.
- Big output capacity: depending on the residual moisture of the linen, up to 290 kg/h straight from a high spin washer extractor.
- Electric, gas or steam heating
- Two versions for gas heated models:
 - atmospheric burners
 - radiant burners : **25 % gas consumption savings and 25 % more production**
- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar



OPTIONS

- 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass
- Motorized rear exit, height 850 mm
- Small pieces 2 lanes back collector + by-pass
- Small pieces 4 lanes back collector + by-pass
- By-pass folder
- Double air pressure in length folds for thicker linen
- Linen reject system
- Cross-folder + stacker
- Special tension




Intertek



Intertek

TECHNICAL DATA	UNIT.	SP1000-2600	SP1000-3300
GENERAL DATA			
Theoretical production (45 % humidity)	Kg/h	190 - 230	250 - 290
Ø roll	mm	1000	1000
Working width	mm	2.600	3.300
Height of feeding	mm	1.050	1.050
Ironing speed	m/min	4 - 18	4 - 18
Control type	-	Touch	Touch
No of programs	N°	20	20
FOLDING			
1 lane - lengthfold	N°	1-2	1-2
1 lane - crossfold	N°	-	-
2 lanes - lengthfold	N°	1-2	1-2
2 lanes - crossfold	N°	-	-
POWER			
Electric heating	kW	90	90
Max. electric power electric heating	kW	92,60	92,60
Gas heating (natural / LPG)	kW	120,90 / 121,30	155,70 / 159,10
Max. electric power gas heating	kW	2,6	2,6
Steam heating	kW	120	150
Max. electric power steam heating	kW	2,6	2,6
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1-1/4"	1-1/4"
Ø Condensed (steam models)	BSP	1"	1"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKING DIMENSIONS			
Net width / gross width	mm	3.786 / 3.870	4.486 / 4.570
Net depth / gross depth	mm	1.985 / 2.070	1.985 / 2.070
Net height / gross height	mm	2.180 / 2.380	2.180 / 2.380
Net weight / gross weight	kg	3.350 / 3.800	3.950 / 4.500
Volume	m ³	16,38 / 19,07	19,41 / 22,51
OTHERS			
No fume outlet	No	2	2
Ø fume outlet	mm	160	160
Extraction rate	m ³ /h	2 x 1000	2 x 1000
Compressed air consumption (6,5 bar)	NI/h	9.500	9.500
Sound level	dB	70	70

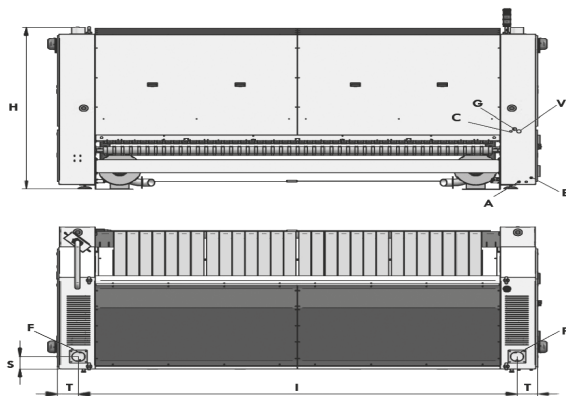

- A. Compressed air inlet
- C. Condensed discharge (steam models)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
SP1000-2600	2.166	3.242	186	152	Ø 12	1"	5 x 2,5	Ø 160	1"	1-1/4"
SP1000-3300	2.166	3.942	186	152	Ø 12	1"	5 x 2,5	Ø 160	1"	1-1/4"