



# STD-BRONZE EM TUMBLE DRYERS STD-11 / 16



## EM PROGRAMMER

Easy-to-use electronic control with push buttons to control temperature and time



## OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter  
New **PLUS** model, gas heated: more powerful to achieve more productivity (see specific datasheet)



## VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



## ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters




## MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with external console



## OTHERS

Grey skinplate outer casing, stainless steel look  
Transmission by direct drive  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved

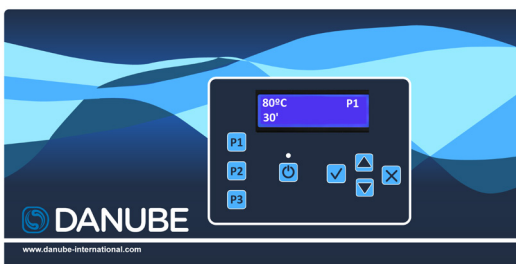

EM programmer + new display

## OPTIONS

- New display for EM programmer (2 units)
- Double doorglass
- Reverse door opening
- Rear panel with external air inlet + filter
- Stainless steel outer casing
- Stainless steel front panel
- Fluff filter with grid 0,3 mm (standard is 0,6 mm)




Intertek



Intertek

TECHNICAL DATA	UNIT.	STD-11 BRONZE EM	STD-16 BRONZE EM		
<b>CAPACITY</b>					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	2 x 14 / 2 x 13	2 x 21 / 2 x 20		
Evaporation capacity*	l/h	16,50	25,50		
<b>DRUM</b>					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547 / 1.522	547 / 1.522		
Load hole bottom height	mm	260 / 1.235	260 / 1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
<b>POWER</b>					
Drum motor power	kW	0,37 x 2	0,37 x 2		
Fan motor power STD BRONZE	kW	0,25 x 2	0,25 x 2		
Electric heating power ALL RANGES	kW	12 x 2	12 x 2		
Total electric power (elec.model) STD BRONZE	kW	25,35	25,35		
Gas heating power ALL RANGES	kW	12 x 2	12 x 2		
Total electric power (gas model) STD BRONZE	kW	1,34	1,34		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	mm	260 / 268		290 / 303	
<b>OTHERS</b>					
Max airflow	m3/h	1.000		1.000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

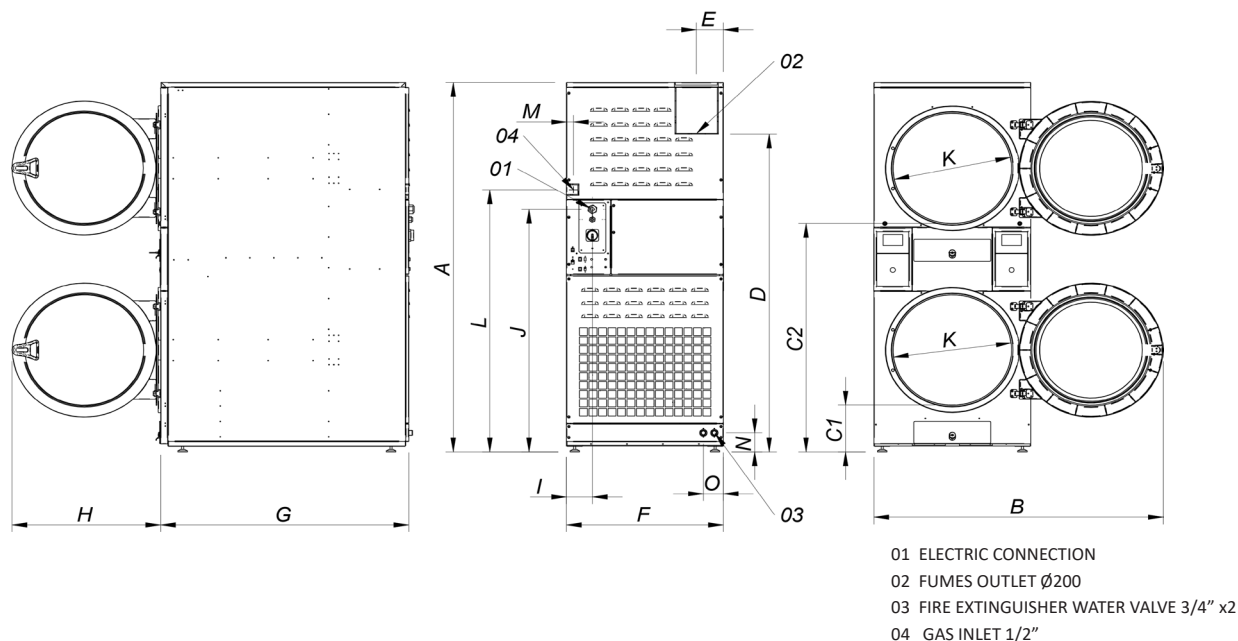

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
STD-11	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	103	100
STD-16	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	103	100