



HIGH SPIN WASHER EXTRACTORS

WED-60 / 100C / 120C ET2

EASY TOUCH 2

User friendly and totally programmable 7" ET2
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions)
37 languages
8 dosing signals as standard

G FACTOR

High G-Factor 450 (for WED-60) and 350 (for WED-100C and 120C)

EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: AQUABAC
Low water consumption

VERSATILITY

Electric < > Hot water
WET CLEANING features as standard

CONNECTIVITY

Remote technical service
Management of laundries: OPL
Remote payment

ERGONOMICS

Biggest door diameters: Ø 560 mm (WED-60) and Ø 700 mm (WED-100C and 120C)
Easy opening/closing system for door lock

MAINTENANCE

Equivalent parts for all models: contactors, electronic devices, gear
Technical menu: traceability, error diagnosis

OTHERS

Free standing models
Grey skinplate outer casing
Drum and tub in stainless steel AISI 304
Detergent dispenser with 5 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
CE and WRAS approved product. Option ETL



OPTIONS

- Double drain
- Normally closed valve for WED-60
- Tilting options: frontal or double tilt
- Water inlet hose (for WED-60)
- 6 extra dosing signals relay card
- Weighing system: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Printer
- Danube Online IoT communication
- Reversible door opening (for WED-60)
- Tropicalized model: protected board
- Kit to transform an E or HW heated machine into steam version (for WED-60)
- Double heating E + S (for WED-60)
- Panel to cover feet for WED-60
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel




Intertek



Intertek

TECHNICAL DATA	UNIT.	WED-60 ET2	WED-100C ET2	WED-120C ET2
DRUM				
Load capacity 1:9 / 1:10	Kg	67/60	105/95	128/115
Volume	l	600	950	1.150
Diameter	mm	1.048	1.360	1.360
Depth	mm	684	654	792
GENERAL DETAILS				
Washing speed / Spinning speed	r.p.m.	38/875	34/678	34/678
G Factor	-	450	350	350
Maximum force transmitted	KN	12,95 ±4,2	37,77 ±5,25	37,77 ±5,25
Frequency-dynamic force	Hz	12,66	11,33	11,33
Noise level	dB	<70	<70	<70
Coin laundry version	-	NO	NO	NO
Double drain	-	OPT	OPT	OPT
Weighing System / Tilting System	-	OPT/OPT	OPT/OPT	OPT/OPT
DOOR				
Height door center / door base	mm	1.190/830	1.330/900	1.330/900
Diameter	mm	560	700	700
POWER				
Motor	kW	11	15	15
Electric heating power	kW	36	-	-
Total electric power (electric model)	kW	40	-	-
Total electric power (hot water, steam mod.)	kW	11	15	15
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	STEAM / HOT WATER
Tension 230V - III + T	Nº x mm2 / A	3 x 25 / 100A	-	-
Tension 400V - III + N + T	Nº x mm2 / A	4 x 16 / 63A	4 x 4 / 32A	4 x 6 / 40A
Steam inlet (Steam model)	Inch	3/4"	1-1/4"	1-1/4"
Maximum steam consumption (Steam model)	Kg/h	18	26,5	26,5
Water inlet	Inch	1"	1-1/2"	1-1/2"
Water main pressure	Kgs/cm ²	2-4	2-4	2-4
Maximum water consumption*	Lit/h	633	1.254	1.254
Compressed air inlet	Inch	-	1/4"	1/4"
Compressed air pressure	Bar	-	4	4
Drain	Inch	3"	4"	4"
Drainage capacity	Lit/min	200	500	500
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	mm	1.478/1.540	1.815/1.900	1.815/1.900
Net Depth / Gross Depth	mm	1.444/1.580	1.690/1.940	1.828/1.940
Net Height / Gross Height	mm	1.945/1.970	2.245/2.290	2.245/2.290
Net weight / Gross weight	kg	1.400/1.520	3.900/4.050	3.950/4.100
Volume	m3	4,79	8,44	8,44

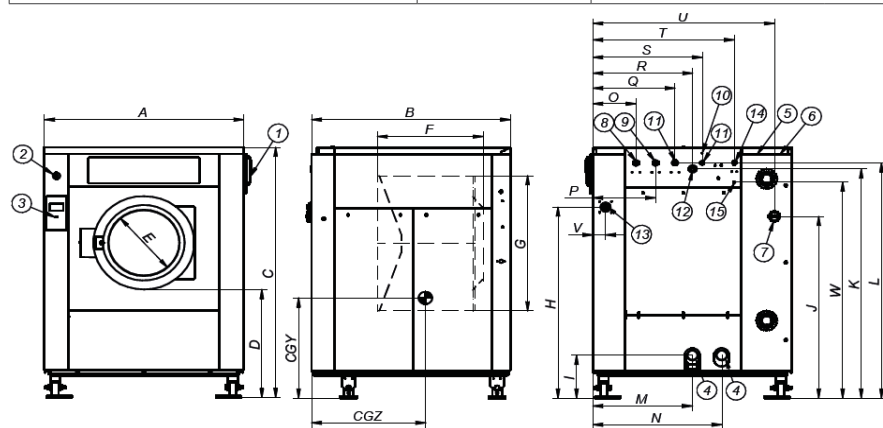

- 1 SOAP DISPENSER
2 EMERGENCY STOP
3 USB PORT
4 DRAIN
5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6 ELECTRICAL CONNECTION
7 MAIN SWITCH
8 AUXILIAR WATER INLET
9 HOT WATER INLET
10 EQUIPOTENTIAL CONNECTION
11 COLD WATER INLET
12 BLUR OUTPUT / WATER OVERLOAD
13 LIQUID SOAP CONNECTION
14 STEAM CONNECTION
15 AIR INTAKE

* N°2 Program, 100% load

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-60	1.427	1.426	1.945	825	560	760	1.050	1.500	350	1.420	1.780	1.842	714	924	309	449	589	715	784	968	1.300	90	1.692	644	972
WED-100C	1.765	1.650	2.245	945	700	792	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.025
WED-120C	1.765	1.832	2.245	945	700	930	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.130