



NORMAL SPIN WASHER EXTRACTORS

WEN-27/35C/45C/60 ET2



EASY TOUCH 2

User friendly and totally programmable 7" ET2
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor 200 for low spin washers
Reduced residual moisture, reduced drying time
(G-FACTOR 150 for WEN-60)



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: AQUAFLOW
Low water consumption



VERSATILITY

Make to order: customisation
OPL <> COIN
Electric <> Hot water
WET CLEANING features as standard



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø 460 mm (for WEN-27) and Ø
560 mm (for WEN-35C/45C/60)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors,
electronic devices, gear
Technical menu: traceability, error diagnosis



OTHERS

Hard mounted washers to be anchored to the floor
Grey skinplate outer casing.
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments.
Electronic control of imbalance with frequency control.
LOADING AID feature: water and rotation control.
CE and WRAS approved product



OPTIONS

- Double drain
- Normally closed valve
- Silicon gasket (WEN-27)
- AQUA FLOW: recirculation of bath water
- 6 extra dosing signals relay card
- Printer
- Danube Online IoT communication
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- SLUICE: model with 8mm drum holes (WEN-27 to 45C)
- Anchoring base
- Coin / token kit
- Delayed door opening in case of power outage




Intertek



Intertek

TECHNICAL DATA	UNIT.	WEN-27 ET2	WEN-35C ET2	WEN-45C ET2	WEN-60 ET2				
DRUM									
Capacity 1:9 / 1:10	Kg	28/25	39/35	47/42	67/60				
Volume	l	250	350	420	600				
Diameter	mm	770	860	860	1.048				
Depth	mm	530	602	723	684				
GENERAL DETAILS									
Washing speed/ Spinning speed	r.p.m.	40/682	45/644	45/644	42,5/505				
Factor G	-	200	200	200	150				
Maximum force transmitted	KN	3,53 ±6	4,59 ±8	4,59 ±8	9,12 ±15				
Frequency-dynamic force	Hz	8,02	7,58	7,58	6,93				
Noise level	dB	<70	<70	<70	<70				
Coin laundry version	-	YES	YES	YES	YES				
Double drain	-	OPT	OPT	OPT	OPT				
Weighing / Tilting system	-	NO / NO	NO / NO	NO / NO	NO / NO				
SLUICE - Opt. 8mm holes drum	-	YES	YES	YES	NO				
DRUM									
Height door center/ door base	mm	700/400	735/440	735/440	900/540				
Diameter	mm	460	560	560	560				
POWER									
Motor	kW	3	4	6	5,5				
Electric heating power	kW	18	21	21	36				
Total electric power (elect. mod.)	kW	19	22	23	38				
Total electric power (hot water, steam models)	kW	3	4	6	5,5				
CONNECTIONS		ELECTR.	STEAM HW	ELECTR.	STEAM HW	ELECTR.	STEAM HW	ELECTR.	STEAM HW
Tension 230V- I + N + T	N° x mm2 / A	-	2x1,5 / 6A	-	2x2,5 / 20A	-	-	-	-
Tension 230V- III + T		3x16 / 63A	-	3x16 / 63A	-	3x16 / 63A	-	-	-
Tension 400V- III + N + T		4x4 / 32A	-	4x6 / 40A	-	4x6 / 40A	4x1,5 / 16A	4x16 / 63A	4x2,5 / 20A
Steam inlet (Steam model)	Inch	3/4"		3/4"		3/4"		3/4"	
Max. steam cons. (Steam mod.)	Kg/h	15		18		18		21	
Water inlet	Inch	3/4"		3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4		2-4		2-4	
Maximum water consumption*	Lit/h	176,1		199,6		199,6		627,9	
Drain	Inch	3"		3"		3"		3"	
Drainage capacity	Lit/min	200		200		200		200	
DIMENSIONS / PACKING DIMENSIONS									
Net Width / Gross Width	mm	884/930		979/1.050		979/1.050		1.225/1.360	
Net Depth / Gross Depth	mm	965/1.150		1.066/1.250		1.200/1.480		1.279/1.480	
Net Height / Gross Height	mm	1.340/1.523		1.411/1.670		1.411/1.670		1.640/1.880	
Net weight / Gross weight	kg	340/370		473/503		523/553		930/1.050	
Volume	m3	1,63		2,19		2,60		3,78	

* N°20 Program, 75% load

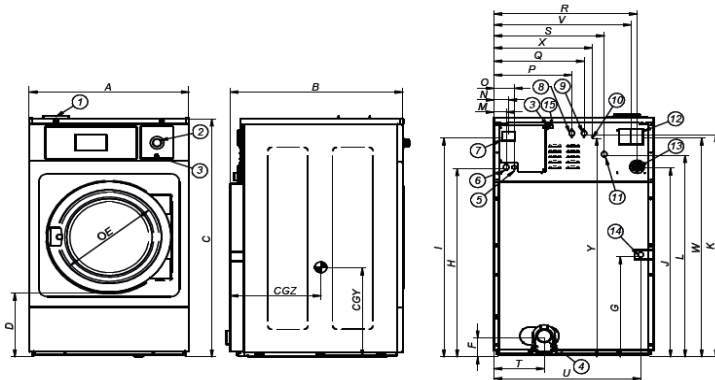

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION
- 15 ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEN-27	884	965	1.340	400	460	145	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	591	543
WEN-35X	979	1.065	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
WEN-45C	979	1.185	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760
WEN-60	1.225	1.279	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	972