



# PROFESSIONAL WASHERS EXTRACTORS

WPR-8 / WPR-10 ET2



## VERSATILITY

OPL <> COIN  
ELECTRIC <> HOT WATER  
DRAIN VALVE <> PUMP  
SINGLE <> STACKED  
WET CLEANING standard  
Suitable for many sectors: restaurants, gyms, campings, laundromats, dry cleaners, nurseries, facility services (mops)...



## FEATURES

High G factor 450  
User friendly and fully programmable ET2 control with 4,3" touch screen  
Display of videos (very useful for self-service)  
8 dosing signals as standard  
USB connection. Free PC software for programming, traceability, data analysis...  
Traceability as standard  
WET CLEANING as standard: fully adjustable water levels and washing speeds for delicate laundry  
Remote communication ready  
Multi-payment system  
Short washing cycles (heating power 6 kw)



## EFFICIENCY

Water Saving: possibility to choose between 3 levels of savings  
Optimal Loading: water levels and detergents adapted to the load  
High G factor 450: reduced residual moisture, reduced drying time  
Base for mops cleaning as option  
Base for water recovery with tank as option



## ROBUSTNESS

Skinplate outer casing, robust aluminium door  
AISI 304 stainless steel vat, drum and ribs  
No inner drum seal: easier to clean  
Industrial house bearing and bearings (up to 15000 working hours)  
Same gear and inverter as industrial models  
Industrial door locking system



## OTHERS

Free standing: no anchoring to the floor  
2 water inlets  
Detergents dispenser with 4 compartments  
leveling feet included  
Models with drain valve or with drain pump  
Imbalances controlled by frequency inverter  
CE and WRAS approved



WPR+DPR



NEW OPTION  
Soap box on top panel

## OPTIONS

- Double drain kit (only models with drain valve)
- Valve-pump transformation kit
- 6 extra dosing signals for dosing pumps
- Door silicone gasket
- Reversing door opening
- Tropicalized model: protected board
- AISI 304 stainless steel outer casing
- Danube Online communication kit
- Soap dispenser on the top
- Plinth for better ergonomics (loading height)
- Plinth for mops, filter included (only model with valve)
- Plinth for water recovery (tank included)
- Coin kits: token/coins meter + box, central pay
- Automatic door unlock device (in case of power failure)
- Ship tension




Intertek



Intertek

TECHNICAL DATA	UNIT.	WPR-8 ET2 V	WPR-8 ET2 P	WPR-10 ET2 V	WPR-10 ET2 P				
<b>DRUM</b>									
Capacity 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10				
Volume	l	80	80	100	100				
Diameter	mm	532	532	532	532				
Depth	mm	360	360	425	425				
<b>GENERAL DATA</b>									
Washing / spinning speed	r.p.m.	50/1.250	50/1.250	45/1.250	40/1.250				
G factor	-	450	450	450	450				
Maximum force transmitted	KN	1,47 ±0,53	1,47 ±0,53	1,57 ±0,53	1,57 ±0,53				
Frequency dynamic force	Hz	18,33	18,33	18,33	18,33				
Sound level	dB	<70	<70	<70	<70				
Self service version	-	YES	YES	YES	YES				
Double drain	-	YES	NO	YES	NO				
Weighing system	-	NO	NO	NO	NO				
<b>DOOR</b>									
Center door height / base door height	mm	537/280	537/280	537/280	537/280				
Diameter	mm	373	373	373	373				
<b>POWER</b>									
Motor	kW	0,75	0,75	0,75	0,75				
Electric heating power	kW	6	6	6	6				
Total electric power (electric model)	kW	6,25	6,25	6,25	6,25				
Total electric power (hot water model)	kW	0,75	0,75	0,75	0,75				
<b>CONNECTIONS</b>		<b>ELECT.</b>	<b>HOT W.</b>	<b>ELECT.</b>	<b>HOT W.</b>	<b>ELECT.</b>	<b>HOT W.</b>	<b>ELECT.</b>	<b>HOT W.</b>
Tension 230V- I + N + T	N° x mm2 / A	2x4 /32A	2x1,5 /16A	2x4 /32A	2x1,5 /16A	2x4 - 32A	2x1,5 /16A	2x4 /32A	2x1,5 /16A
Tension 230V- III + T		3x2,5 /20A	-	3x2,5 /20A	-	3x2,5 /20A	-	3x2,5 /20A	-
Tension 400V- III + N + T		4x1,5 /16A	-	4x1,5 /16A	-	4x1,5 /16A	-	4x1,5 /16A	-
Tension 110V I + N + T			2x1,5 /10A	-	2x1,5 /10A	-	2x1,5 /10A	-	2x1,5 /10A
Tension 400V III + T		4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A
Water inlet	BSP	3/4"		3/4"		3/4"		3/4"	
Drain	BSP	2"		1" (pompe)		2"		1" (pompe)	
<b>DIMENSIONS / PACKING DIMENSIONS</b>									
Net width / Gross width	mm	680 / 710		680 / 710		680 / 710		680 / 710	
Net depth / Gross width	mm	698 / 832		698 / 832		742 / 832		742 / 832	
Net height / Gross height	mm	1.040 / 1.130		1.040 / 1.130		1.040 / 1.130		1.040 / 1.130	
Net weight / Gross weight	kg	140 / 150		140 / 150		150 / 160		150 / 160	
Volume	m3	0,67		0,67		0,67		0,67	

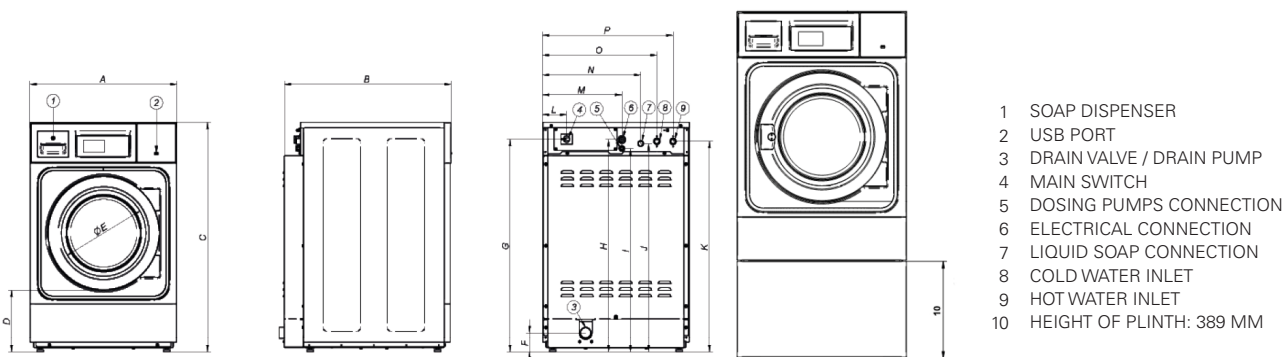

- 1 SOAP DISPENSER
- 2 USB PORT
- 3 DRAIN VALVE / DRAIN PUMP
- 4 MAIN SWITCH
- 5 DOSING PUMPS CONNECTION
- 6 ELECTRICAL CONNECTION
- 7 LIQUID SOAP CONNECTION
- 8 COLD WATER INLET
- 9 HOT WATER INLET
- 10 HEIGHT OF PLINTH: 389 MM

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
WPR-8 V	680	698	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR-8 P	680	698	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR10 V	680	742	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR-10 P	680	742	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199