



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming,
telemetry, data analysis...

Videos display (ads, instructions...)

37 available languages

8 dosing signals as standard.



G FACTOR

High G factor 450 - 500: reduced residual moisture,
reduced drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment
of water levels and detergents according to the load

Water Saving system: 3 configurable levels of savings

Ready for water recovery tanks AQUABAC



VERSATILITY

OPL <> SELF-SERVICE

ELECTRIC <> HOT WATER

MAKE TO ORDER: possibility to customize

WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard

Remote technical service

Management of laundry

Multi-payment system



ERGONOMICS

Big aluminium door ø 460 mm

Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts

Technical menu: statistics, errors...



OTHERS

Free standing: no anchoring to the floor

Stainless steel vat and drum, skinplate outer casing

3 water inlets

4 compartments detergents box

Imbalance controlled by frequency inverter

CE and WRAS certificates. ETL option.




OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- Normally closed valve
- AQUA FLOW bath recirculation kit
- Leveling feet
- Automatic weighing system on feet
- 6 additional dosing signals
- Silicone door gasket
- Reversing door opening
- Tropicalized model (ET2)
- Steam transformation kit
- Ergonomic plinth for loading height
- Plinth for mops, filter included
- Self-service plinth to align all machines from top
- AISI-304 stainless steel outer casing or front panel
- Automatic door unlock device (in case of power failure)
- Coin kits: tokens or coins meter + box, central pay
- Other tensions

TECHNICAL DATA	UNIT.	WED-18 ET2		WED-22 ET2	
DRUM					
Capacity 1:9 / 1:10	kg	20 / 18		25 / 22	
Volume	l	180		220	
Diameter	mm	700		700	
Depth	mm	470		560	
GENERAL DATA					
Washing / extraction speed	r.p.m.	47 / 1.133		47 / 1.071	
G factor	-	500		450	
Maximum force transmitted	KN	3,41 ±1,4		4,12 ±1,4	
Frequency dynamic force	Hz	16		16	
Sound level	dB	<70		<70	
Self-service version	-	YES		YES	
Double drain	-	OPT		OPT	
Weighing / Tilting system	-	OPT / NO		OPT / NO	
Sluice option	-	NO		NO	
DOOR					
Height center / base door	mm	765 / 450		765 / 450	
Diameter	mm	460		460	
POWER					
Motor	kW	2,2		2,2	
Heating (Elec. models)	kW	12		12	
Max. elec. power (Elec. models)	kW	12,75		12,75	
Max. elec. power (steam or hot w.)	kW	2,2		2,2	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	2 x 16 / 63A	2 x 4 / 32A	2 x 16 / 63A	2 x 4 / 32A
Tension 230V - III + T	Nº x mm2 / A	3 x 6 / 40A	-	3 x 6 / 40A	-
Tension 400V - III + N + T	Nº x mm2 / A	4 x 4 / 32A	-	4 x 4 / 32A	-
Steam inlet (steam mod.)	Inch	1/2"		1/2"	
Max. steam consumption	Kg/h	12		12	
Water inlet	Inch	3/4"		3/4"	
Water pressure	Kgs/cm²	2-4		2-4	
Maximum water consumption*	Lit/h	118,3		118,3	
Drain	Inch	3"		3"	
Drain flow	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net / gross length	mm	884 / 945		884 / 945	
Net / gross depth	mm	913 / 1.030		1.003 / 1.140	
Net / gross height	mm	1.415 / 1.700		1.415 / 1.700	
Net / gross weight	kg	360 / 393		380 / 413	
Volume	m3	1,63		1,83	

* N°20 Program, 75% load

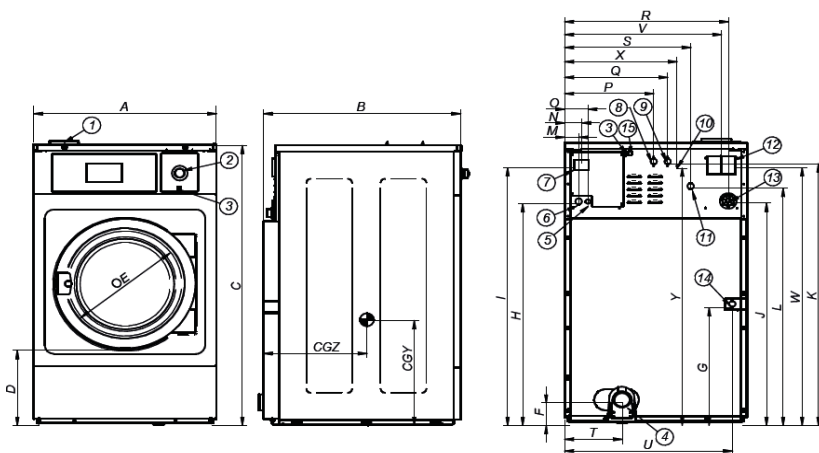

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIARY WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-18	884	913	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	702
WED-22	884	1.003	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	747

