

WED-28 ET2 HIGH SPIN WASHER EXTRACTOR



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming,
telemetry, data analysis...

Videos display (ads, instructions...)

37 available languages

8 dosing signals as standard.



G FACTOR

High G factor 450: reduced residual moisture, reduced
drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment
of water levels and detergents according to the load

Water Saving system: 3 configurable levels of savings

Ready for water recovery tanks AQUABAC



VERSATILITY

OPL <> SELF-SERVICE

ELECTRIC <> HOT WATER

MAKE TO ORDER: possibility to customize

WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard

Remote technical service

Management of laundry

Multi-payment system



ERGONOMICS

Big aluminium door ø 460 mm

Easy door lock system



MAINTENANCE

Hinged panel: easy access to parts

Technical menu: statistics, errors...



OTHERS

Free standing: no anchoring to the floor

Stainless steel vat and drum, skinplate outer casing

3 water inlets

4 compartments detergents box

Imbalance controlled by frequency inverter

CE and WRAS certificates. ETL option.




OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- Normally closed valve
- AQUA FLOW bath recirculation kit
- Leveling feet
- Automatic weighing system on feet
- 6 additional dosing signals
- Silicone door gasket
- Reversing door opening
- Tropicalized model (ET2)
- Steam transformation kit
- Ergonomic plinth for loading height
- Plinth for mops, filter included
- Self-service plinth to align all machines from top
- AISI-304 stainless steel outer casing or front panel
- Automatic door unlock device (in case of power failure)
- Coin kits: tokens or coins meter + box, central pay
- Other tensions

TECHNICAL DATA	UNIT.	WED-28 ET2	
DRUM			
Capacity 1:9 / 1:10	kg	31 / 28	
Volume	l	280	
Diameter	mm	770	
Depth	mm	585	
GENERAL DATA			
Washing / extraction speed	r.p.m.	45 / 1.024	
G factor	-	450	
Maximum force transmitted	KN	5,59 ±1,75	
Frequency dynamic force	Hz	16	
Sound level	dB	<70	
Self-service version	-	YES	
Double drain	-	OPT	
Weighing / Tilting system	-	OPT / NO	
Sluice option	-	NO	
DOOR			
Height center / base door	mm	865 / 560	
Diameter	mm	460	
POWER			
Motor	kW	4	
Heating (Elec. models)	kW	18	
Max. elec. power (Elec. models)	kW	19,20	
Max. elec. power (steam or hot w.)	kW	4	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	2 x 4 / 32A
Tension 230V - III + T	Nº x mm2 / A	3 x 16 / 63A	-
Tension 400V - III + N + T	Nº x mm2 / A	4 x 4 / 32A	-
Steam inlet (steam mod.)	Inch	3/4"	
Max. steam consumption	Kg/h	15	
Water inlet	Inch	3/4"	
Water pressure	Kgs/cm²	2-4	
Maximum water consumption*	Lit/h	175,5	
Drain	Inch	3"	
Drain flow	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net / gross length	mm	979 / 1.040	
Net / gross depth	mm	1.070 / 1.210	
Net / gross height	mm	1.553 / 1.850	
Net / gross weight	kg	540 / 595	
Volume	m3	2,33	

* Nº20 Program, 75% load

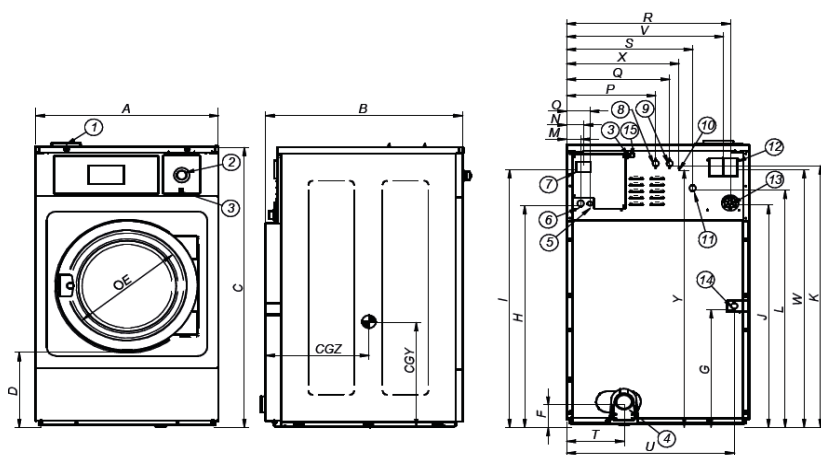

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIARY WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-28	979	1.099	1.553	560	460	133	490	1.282	1.450	1.259	1.465	1.354	61	74	101	481	561	861	673	367	909	831	1.424	624	1.510	773	735

