

# STD-11 / 14 / 18 SILVER ET2 TUMBLE DRYERS



## EASY TOUCH 2

7" touch screen user friendly and programmable ET2  
USB Connection. Online platform free of charge for programming, telemetry, data analysis  
Videos on display (ads, instructions, etc.)  
37 languages



## OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter



## VERSATILITY

Make to order - customisation  
WET CLEANING  
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



## CONNECTIVITY

**Danube Online communication - IoT standard**  
Remote technical service  
Management of laundries: OPL and COIN Remote payment



## ERGONOMICS

Drawer as fluff filter, stainless steel mesh  
Biggest door diameters



## MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics for technicians and maintenance with external console (with console option)



## OTHERS


Grey skinplate outer casing, stainless steel look  
Transmission by direct drive  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved



## OPTIONS

- CARE DRY- Intelligent humidity control. Temperature probe at drum inlet.
- Double door glass
- SPRINKLER - Integrated Fire Extinguishing System
- Tropicalized model
- Opposite door opening
- Perfume dosing-spraying
- Back panel external air + filter
- Fluff filter with grid 0,3 mm (standard is 0,6mm)
- Stainless steel front and side panels
- Frontal panel in stainless steel
- Maritime wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA	UNIT.	STD-11 SILVER ET2	STD-14 SILVER ET2	STD-18 SILVER ET2			
<b>CAPACITY</b>							
Capacity 1/18	Kg	24	30	36			
Capacity 1/20	Kg	22	28	34			
Hourly Output (electr. // gas)	Kg/h	31,6 // 30,6	34,4 // 33,8	36,2 // 36			
Evaporation capacity (electr. // gas)	l/h	15,8 // 15,3	17,2 // 16,9	18,1 // 18			
<b>DRUM</b>							
Ø Drum	mm	750	750	750			
Ø Door	mm	574	574	574			
Door center height	mm	547 / 1.522	547 / 1.522	547 / 1.522			
Door base height	mm	260 / 1.235	260 / 1.235	260 / 1.235			
Drum length	mm	475	610	746			
Drum volume	l	210	269	330			
<b>POWER</b>							
Drum motor power	kW	0,37 x 2	0,37 x 2	0,37 x 2			
Fan motor power	kW	0,25 x 2	0,25 x 2	0,25 x 2			
Electric heating power	kW	12 x 2	12 x 2	12 x 2			
Total electric power (elec.model)	kW	25,34	25,34	25,34			
Gas heating power	kW	12 x 2	12 x 2	12 x 2			
Instant propane gas consumption (G31)	kg/h	1,03 x 2	1,03 x 2	1,03 x 2			
Instant natural gas consumption (G20)	m3/h	1,27 x 2	1,27 x 2	1,27 x 2			
Total electric power (gas model)	kW	1,34	1,34	1,34			
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.106 / 1.189		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	Kg	260 / 268		275 / 293		290 / 317	
<b>OTHERS</b>							
Max airflow	m3/h	500 x 2		500 x 2		500 x 2	
Ø Fume exhaust	mm	200		200		200	
Sound level	dB	64		64		64	

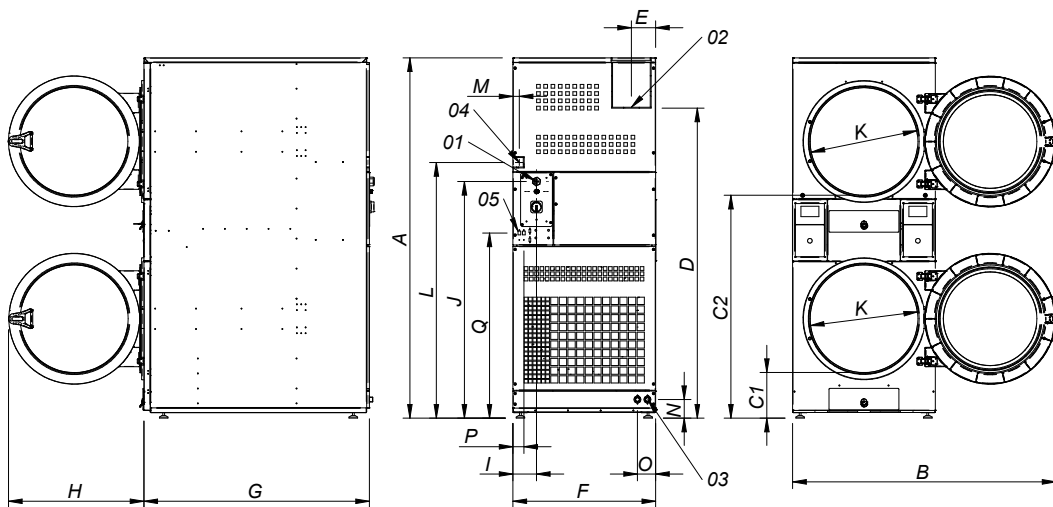

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 2 SPRINKLER VALVES 3/4"
- 04 GAS INLET 1/2
- 05 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
STD-11	1980*	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	103	100	60	1018
STD-14	1980*	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	103	100	60	1018
STD-18	1980*	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	103	100	60	1018

\* Measurement with legs mounted (30mm)

