

STD-18 BRONZE / BASIC PLUS TUMBLE DRYERS



EM PROGRAMMER

Easy-to-use electronic control with push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter

New PLUS model, gas heated: more powerful to achieve more productivity



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Biggest door diameters



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and maintenance with external console (with console option)



OTHERS

SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
CE approved



OPTIONS


- Screen in EM programmer (2 units)



- Double doorglass (STD-18 BRONZE)
- Fluff filter with grid 0,3 mm (standard is 0,6 mm)
- Stainless steel front and side panels (STD-18 BRONZE)
- Front panel in stainless steel (STD-18 BRONZE)
- Maritime wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA		UNIT.	STD-18 BRONZE PLUS		STD-18 BASIC PLUS	
CAPACITY						
Capacity 1/18	Kg		36		36	
Capacity 1/20	Kg		34		34	
Hourly Output (gas)*	Kg/h		35,3		35,3	
Evaporation capacity (gas)*	l/h		70,7		70,7	
DRUM						
Ø Drum	mm		750		750	
Ø Door	mm		574		574	
Door center height	mm		547 / 1.522		547 / 1.522	
Door base height	mm		260 / 1.235		260 / 1.235	
Drum length	mm		746		746	
Drum volume	l		330		330	
POWER						
Drum motor power	kW		0,37x2		0,37x2	
Fan motor power	kW		0,55x2		0,55x2	
Electric heating power	kW		-		-	
Total electric power (elec.model)	kW		-		-	
Gas heating power	kW		24x2		24x2	
Instant propane gas consumption (G31)	kg/h		2,06 X 2		2,06 X 2	
Instant natural gas consumption (G20)	m3/h		2,54 X 2		2,54 X 2	
Total electric power (gas model)	kW		1,94		1,94	
CONNECTIONS			ELECTRICAL		GAS	
Tension 230V - I + N + T	Nº x mm2 / A		-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A		4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A		5 x 10 / 40	3 x 1,5 / 20A	5 x 10 / 40	3 x 1,5 / 20A
Ø Gas inlet	BSP		1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS						
Net width / Gross width	mm		785 / 865		785 / 865	
Net Depth / Gross Depth	mm		1443 / 1457		1443 / 1457	
Net Height / Gross Height	mm		1980 / 2126		1980 / 2126	
Net weight / Gross weight	Kg		320 / 349		320 / 349	
OTHERS						
Max airflow	m3/h		750 x 2		750 x 2	
Ø Fume exhaust	mm		200 x 2		200 x 2	
Sound level	dB		64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

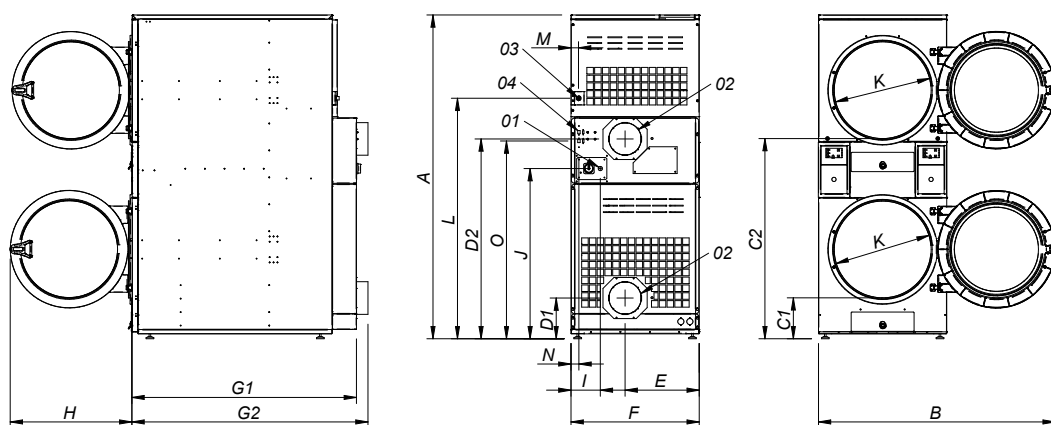

- 01 POWER SUPPLY
- 02 2 FUMES OUTLET Ø200
- 03 2 SPRINKLER VALVES 3/4"
- 04 GAS INLET 1/2"
- 05 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C1	C2	D1	D2	E	F	G1	G2	H	I	J	K	L	M	N	O
STD-18 BRONZE PLUS	1980*	1447	259	1234	250	1223	454	785	1374	1443	735	180	1040	575	1472	45	49	1210
STD-18 BASIC PLUS	1980*	1447	259	1234	250	1223	454	785	1374	1443	735	180	1040	575	1472	45	49	1210

* Medida con patas montadas (30mm)

