



COMPACT IRONERS

Ø 600 MM

SP600-2600 / SP600-3300



SP models are ironers that dries, irons and folds with a lengthwise folder making up to two length folds.

- Roll dimensions: working width 2m60 and 3m30, diameter 600 mm.
- 1 or 2 length folds with 2 independent lanes
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in white painted steel.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with speed control between 3 and 10 m/min and temperature.
- Big output capacity: depending on the residual moisture of the linen, up to 140 kg/h straight from a high spin washer extractor.
- Electric, gas or steam heating
- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar



OPTIONS

- 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass
- Motorized rear exit, height 850 mm
- Small pieces 2 lanes back collector + by-pass
- Small pieces 4 lanes back collector + by-pass
- By-pass folder
- Double air pressure in length folds for thicker linen
- Linen reject system
- Cross-folder + stacker
- Special tension




Intertek



Intertek

TECHNICAL DATA	UNIT.	SP600-2600	SP600-3300
GENERAL DATA			
Theoretical production (45 % humidity)	Kg/h	75 - 105	110 - 140
Ø roll	mm	600	600
Working width	mm	2.600	3.300
Height of feeding	mm	1.050	1.050
Ironing speed	m/min	3 - 10	3 - 10
Control type	-	Touch	Touch
No of programs	N°	20	20
FOLDING			
1 lane - lengthfold	N°	1-2	1-2
1 lane - crossfold	N°	-	-
2 lanes - lengthfold	N°	1-2	1-2
2 lanes - crossfold	N°	-	-
POWER			
Electric heating	kW	54	54
Max. electric power electric heating	kW	55,9	55,9
Gas heating (natural / LPG)	kW	63,30 / 67,40	80,30 / 86.30
Max. electric power gas heating	kW	1,9	1,9
Steam heating	kW	55	75
Max. electric power steam heating	kW	1,9	1,9
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (steam models)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKING DIMENSIONS			
Net width / gross width	mm	3.670 / 3.830	4.370 / 4.530
Net depth / gross depth	mm	1.440 / 1.620	1.440 / 1.620
Net height / gross height	mm	2.030 / 1.960	2.030 / 1.960
Net weight / gross weight	kg	1.800 / 2.050	2.050 / 2.350
Volume	m3	10,73 / 12,16	12,77 / 14,38
OTHERS			
No fume outlet	No	2	2
Ø fume outlet	mm	120	120
Extraction rate	m3/h	2 x 1000	2 x 1000
Compressed air consumption (6,5 bar)	NI/h	5.000	5.000
Sound level	dB	70	70

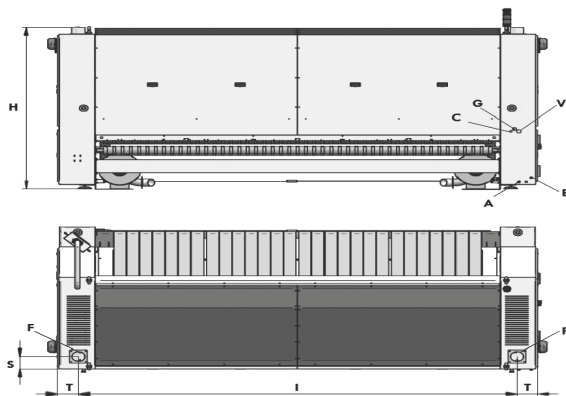

- A. Compressed air inlet
- C. Condensed discharge (steam models)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
SP600-2600	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
SP600-3300	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"